

1.CABLE:


CONDUCTOR: 28 AWG SOLID SILVER PLATED COPPER.
 INSULATION: SKIN-FOAM-SKIN
 PAIR: 2 WIRES, WH AND YE PARALLEL.
 CORE: 4 PAIRS
 PAIR DRAIN WIRE: Ø0.25 mm TINNED COPPER.
 PAIR SHIELD: ALUMINUM FOIL OVERLAPPED, ALU INSIDE.
 INNER SHIELD: ALUMINUM FOIL OVERLAPPED, APPLIED LONGITUDINALLY.
 OUTER SHIELD: 38 AWG TINNED COPPER BRAID, 85% COVERAGE.
 DIAMETER: 5.6 ± 0.2 mm
 PRINT LEGEND: "LEONI High Speed Cables ParaLink -11 100[®]Ω 4pairs 28AWG (shielded) (UL) E116441 CL2 75°C
 "internal lot number" IEC60332-3-24 "sequential length in metres"
 DIFFERENTIAL IMPEDANCE: 100±5 OHM.

2. CONNECTOR:

P1: Mini SAS 4x CABLE PLUG - 26CKT CONNECTOR (SFF-8088)
 (1) P.C.B: FR4, 4 LAYERS
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) WITH EXTERNAL UNIVERSAL KEY
 P2: Mini SAS HD 4x CABLE PLUG (SFF-8644)
 (1) P.C.B: FR408, 6 LAYERS
 (2) LATCH: STAINLESS STEEL.
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) PULL TAB: NYLON UL94V-0, COLOR: BLUE.
 (5) EMI CONDUCTIVE GASKET.


3. FOR SAS 6.0 Gbps.

4. TWO-WIRED SERIAL MEMORY: ATMEL AT24C02B EEPROM (256 BYTES).

△					Data	2011.04.27	Part No.	CAB-8644-8088P-S6-1	 ACE PLUS CORP.
△				Design					
△				Check					
Revision	Data	Content	Confirm	Design	Confirm		Cisco Part No.		DWG.No. CAB-8644-8088P-S6-1 Version 1.0

WIRING DIAGRAM

HIGH SPEED SIGNAL			
P1(Mini SAS 4x Plug)		P2(Mini SAS HD 4x Plug)	
PIN	SIGNAL	PAD	SIGNAL
A2	RX0+	D4	TX0+
A3	RX0-	D5	TX0-
A5	RX1+	C4	TX1+
A6	RX1-	C5	TX1-
A8	RX2+	D7	TX2+
A9	RX2-	D8	TX2-
A11	RX3+	C7	TX3+
A12	RX3-	C8	TX3-
B2	TX0+	B4	RX0+
B3	TX0-	B5	RX0-
B5	TX1+	A4	RX1+
B6	TX1-	A5	RX1-
B8	TX2+	B7	RX2+
B9	TX2-	B8	RX2-
B11	TX3+	A7	RX3+
B12	TX3-	A8	RX3-
GND GROUP	GND	GND GROUP	GND
GND GROUP: A1,A4,A7,A10,A13, B1,B4,B7,B10,B13.		GND GROUP: A3,A6,A9,B3,B6,B9, C3,C6,C9,D3,D6,D9.	
Connector Shell		Connector Shell	

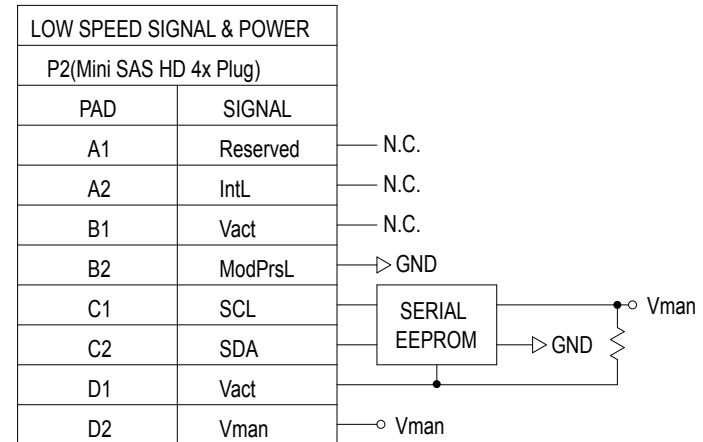

△				Data	2011.04.27	Part No.	CAB-8644-8088P-S6-1	
△				Design				
△				Check				
Revision	Data	Content	Confirm	Design	Confirm	Cisco Part No.		DWG.No. CAB-8644-8088P-S6-1 Version 1.0