

No.	Length (mm)	Tolerance (mm)	AWG	OD(mm)	Cable	EQ	Item No.
1	500	± 25	28	7.9	M	x	CAB-QP-8088R-28G-0.5
2	1000	± 30	28	7.9	M	x	CAB-QP-8088R-28G-1
3	2000	± 50	28	7.9	M	x	CAB-QP-8088R-28G-2
4	3000	± 50	28	7.9	M	x	CAB-QP-8088R-28G-3
5	3000	± 50	26	8.8	M	x	CAB-QP-8088R-26G-3
6	5000	± 70	26	8.8	M	x	CAB-QP-8088R-26G-5
7	7000	± 70	24	9.8	M	x	CAB-QP-8088R-24G-7
8	10000	± 70	24	9.8	A	v	CAB-QP-E8088R-24G-10 ( not guarantee)

**1. CABLE:**

CONDUCTOR:28AWG SOLID SILVER PLATED COPPER.  
 INSULATION:FOAM POLYOLEFIN.  
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.  
 CORE: 8 PAIRS  
 PAIR DRAIN WIRE: 30AWG SOLID SILVER PLATED COPPER.  
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP.  
 INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP.  
 OUTER SHIELD: 38AWG TIN PLATED COPPER BRAID, 85% COVERAGE.  
 DIAMETER: 7.874mm  
 PRINT LEGEND: "MADISON CABLE CORP.TYPE CL2 75°C 28AWG (UL) TurboTwin™ RoHS COMPLIANT"  
 DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR  
 UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE.


**2. CONNECTOR:**

P1: Mini SAS 4x CABLE PLUG - 26CKT CONNECTOR(SFF-8088)  
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS.  
 (2) LATCH: STAINLESS STEEL.  
 (3) BACKSHELL: ZINC DIE CASTING HOOD/NICKEL PLATING.  
 (4) WITH EXTERNAL UNIVERSAL KEY.  
 P2: 4x-Pluggable-QSFP(SFF-8436)  
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS.  
 (SPCB-040078A, AC Coupling)  
 (2) LATCH: STAINLESS STEEL WITH PULL TAB.  
 (3) BACKSHELL: ZINC DIE CASTING HOOD/ NICKEL PLATING.

3. For Infiniband DDR / For SAS 6G .

4. TWO-WIRED SERIAL MEMORY: ATMEL AT24C02B EEPROM (256 BYTES),  
 DIGITAL MONITORING & CONTROL FUNCTION  
 AND MEMORY PAGE NOT SUPPORTED.





△					Date	2013.01.22	Part No.	CAB-QP-8088R-28G-1	 <b>ACE PLUS CORP.</b>	
△				Design		Customer P/N				
△				Check						
Revision	Data	Content	Confirm	Design	Confirm		DWG.No.	CAB-QP-8088R-28G-1	Version	1.0

## WIRING DIAGRAM

HIGH SPEED SIGNAL			
P1(Mini SAS 4x Plug)		P2(4x-Pluggable-QSFP)	
PIN	SIGNAL	PAD	SIGNAL
A6	RX1-	02	TX2n
A5	RX1+	03	TX2p
A12	RX3-	05	TX4n
A11	RX3+	06	TX4p
B8	TX2+	14	RX3p
B9	TX2-	15	RX3n
B2	TX0+	17	RX1p
B3	TX0-	18	RX1n
B6	TX1-	21	RX2n
B5	TX1+	22	RX2p
B12	TX3-	24	RX4n
B11	TX3+	25	RX4p
A8	RX2+	33	TX3p
A9	RX2-	34	TX3n
A2	RX0+	36	TX1p
A3	RX0-	37	TX1n
GND GROUP	GND	GND GROUP	GND
GND GROUP: A1,A4,A7,A10,A13, B1,B4,B7,B10,B13.		GND GROUP: 01,04,07,13,16,19, 20,23,26,32,35,38.	
Connector Shell		Connector Shell	

\*DC Blocking Caps on P2 Rx End.

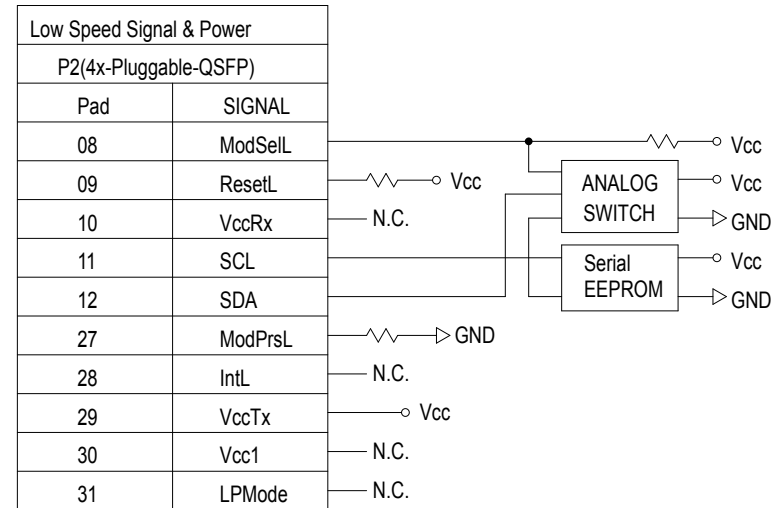

△				Date	2013.01.22	Part No.	CAB-QP-8088R-28G-1	 <b>ACE PLUS CORP.</b>		
△				Design						
△				Check						
Revision	Data	Content	Confirm	Design	Confirm	Customer P/N	DWG.No.	CAB-QP-8088R-28G-1	Version	1.0